



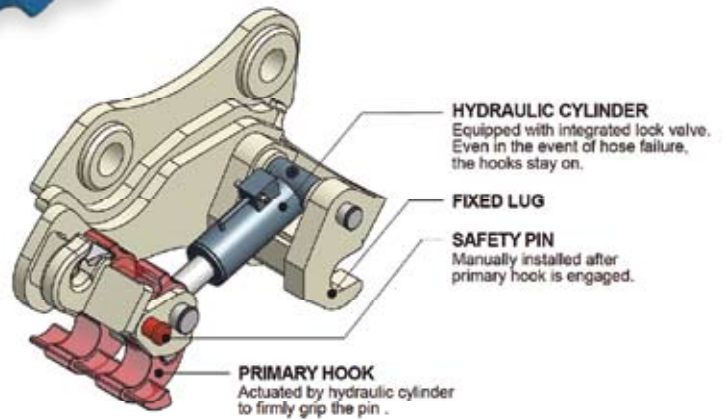

OKH series

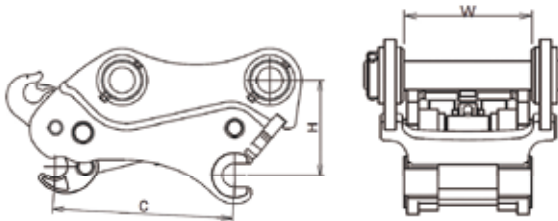

◆ Specifications (Hydraulic Type)

	Unit	OKH-20	OKH-45	OKH-60	OKH-80	OKH-150	OKH-250	OKH-300
Operating Weight	kg	23~30	35~40	45~50	70~92	195~215	310~350	470~550
Pin Center (C)	mm	83~142	135~200	220~285	290~310	362~395	430~467	475~513
Pin Height (H)	mm	150~165	150~165	175	190~210	231	285	332
Width (W)	mm	95~119	122~180	150~172	180~201	218~275	306~340	346~411
Pin Diameter	mm	30	35	45	50	65	80	90
Suitable Carrier Range	Ton	1.5~1.8	2.0~3.8	4.0~5.5	6.0~8.0	9~15	18~23	24~30

Note) The above specifications are subject to change without notice.
 The weight varies depending on the type of excavator.
 The pin center (C) above varies per model of carrier machine.

OKADA AIYON CORPORATION

www.okada-aiyon.com

4-1-18, Kaigan-dori, Minato-ku, Osaka 552-0022, Japan

Tel +81-(0)6-6576-1268 Fax +81-(0)6-6576-1516

Email sales@aiyon.co.jp

facebook.com/okadaaiyon

youtube.com/OkadaAiyonCorp

